


附着Anchorage

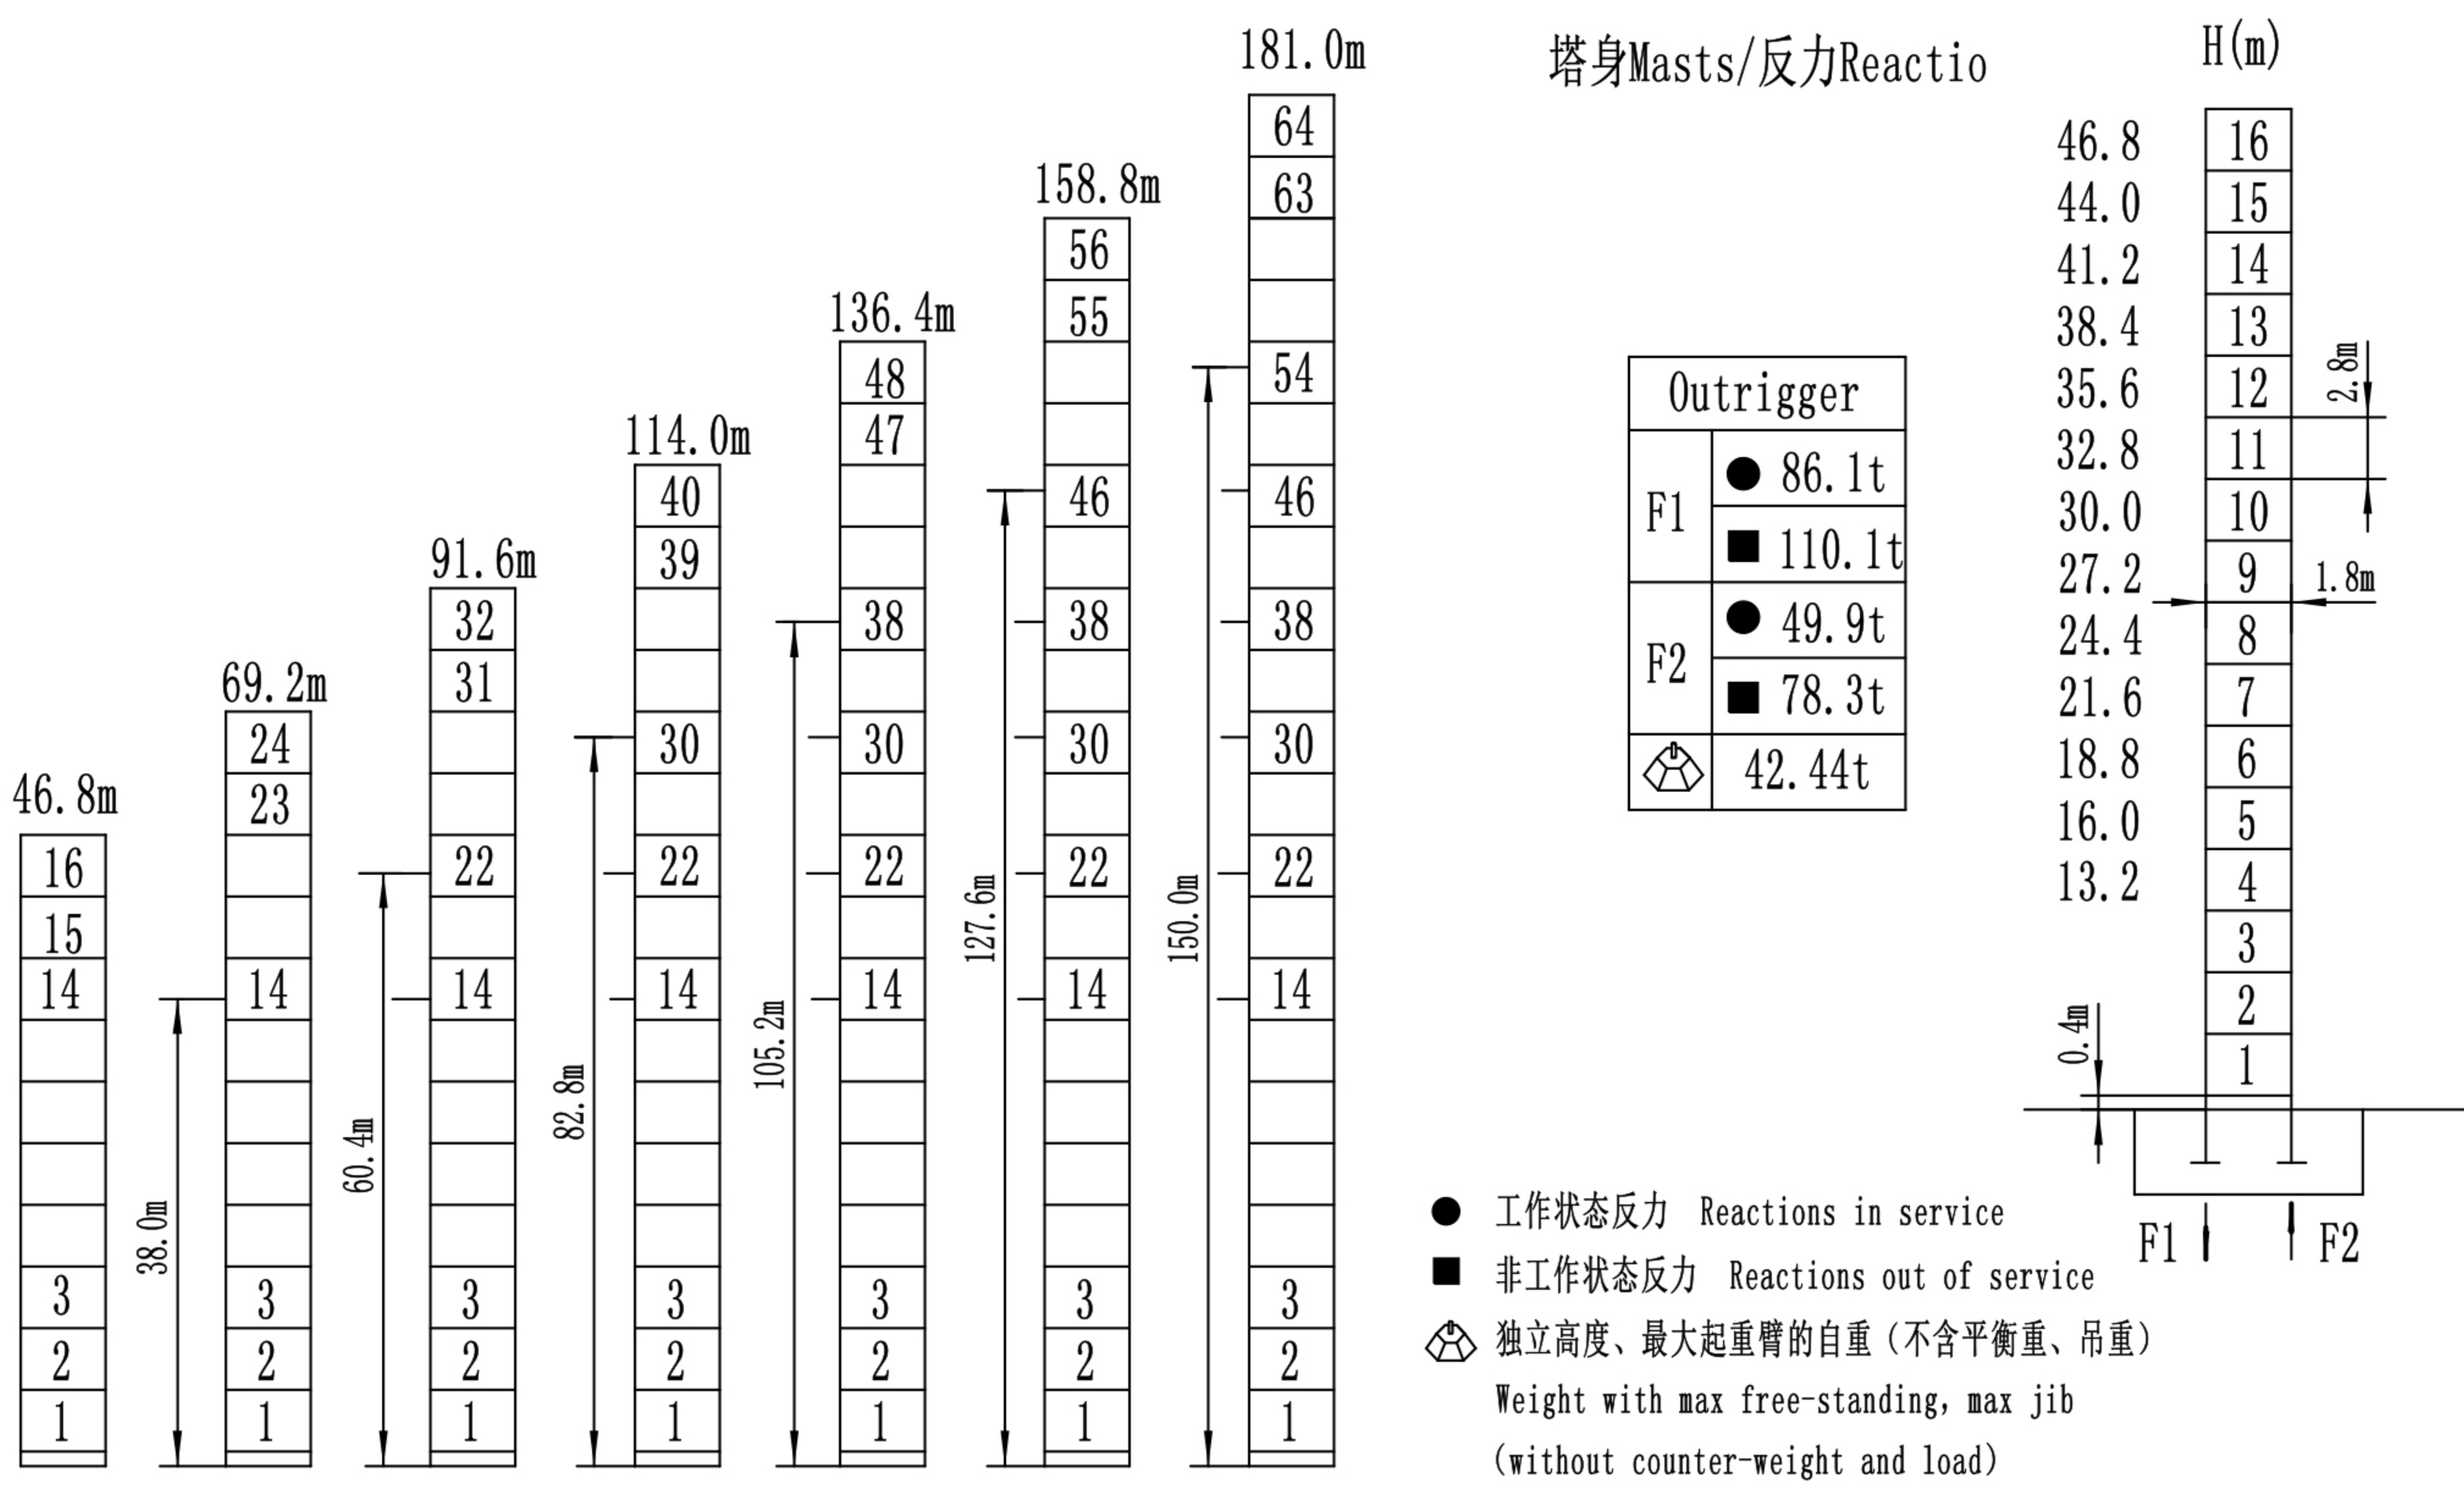

起重特性Load Diagrams

R(m)	最大额定起重重量时的最大工作幅度 Max Capacity	20	25	30	35	40	45	50	55	60	
		60m臂 (R=61.59m)	bb	3-14.76/8.0t	5.73	4.45	3.60	2.99	2.53	2.18	1.89
	b	3-28.21/4.0t	4.00	3.73	3.12	2.66	2.31	2.02	1.79	1.60	
55m臂 (R=56.59m)	bb	3-15.43/8.0t	6.02	4.68	3.79	3.15	2.68	2.31	2.01	1.77	
	b	3-29.50/4.0t	4.00	3.92	3.28	2.81	2.44	2.14	1.90		
50m臂 (R=51.59m)	bb	3-16.34/8.0t	6.41	5.00	4.05	3.38	2.87	2.48	2.17		
	b	3-31.24/4.0t	4.00		3.51	3.00	2.61	2.30			
45m臂 (R=46.59m)	bb	3-17.30/8.0t	6.83	5.33	4.33	3.62	3.08	2.67			
	b	3-33.08/4.0t	4.00		3.75	3.21	2.80				
40m臂 (R=41.59m)	bb	3-18.15/8.0t	7.20	5.62	4.58	3.83	3.27				
	b	3-34.70/4.0t	4.00		3.96	3.40					

传动机构Mechanisms

配置Configuration		b		bb		kW		
 起升 Hoisting	QTJ8.80PY	m/min	0~80	0~40	0~40	0~20	30	420m(5 layers)
		t	2	4	4	8		
 回转 Slewing	HP40.120.195A	r/min	0~0.6				4×2	▲超出咨询我们 Consult us if overtop
 变幅 Trolleying	BP4060X	m/min	0~40				4	
		380V(±10%)50Hz		42kW				