



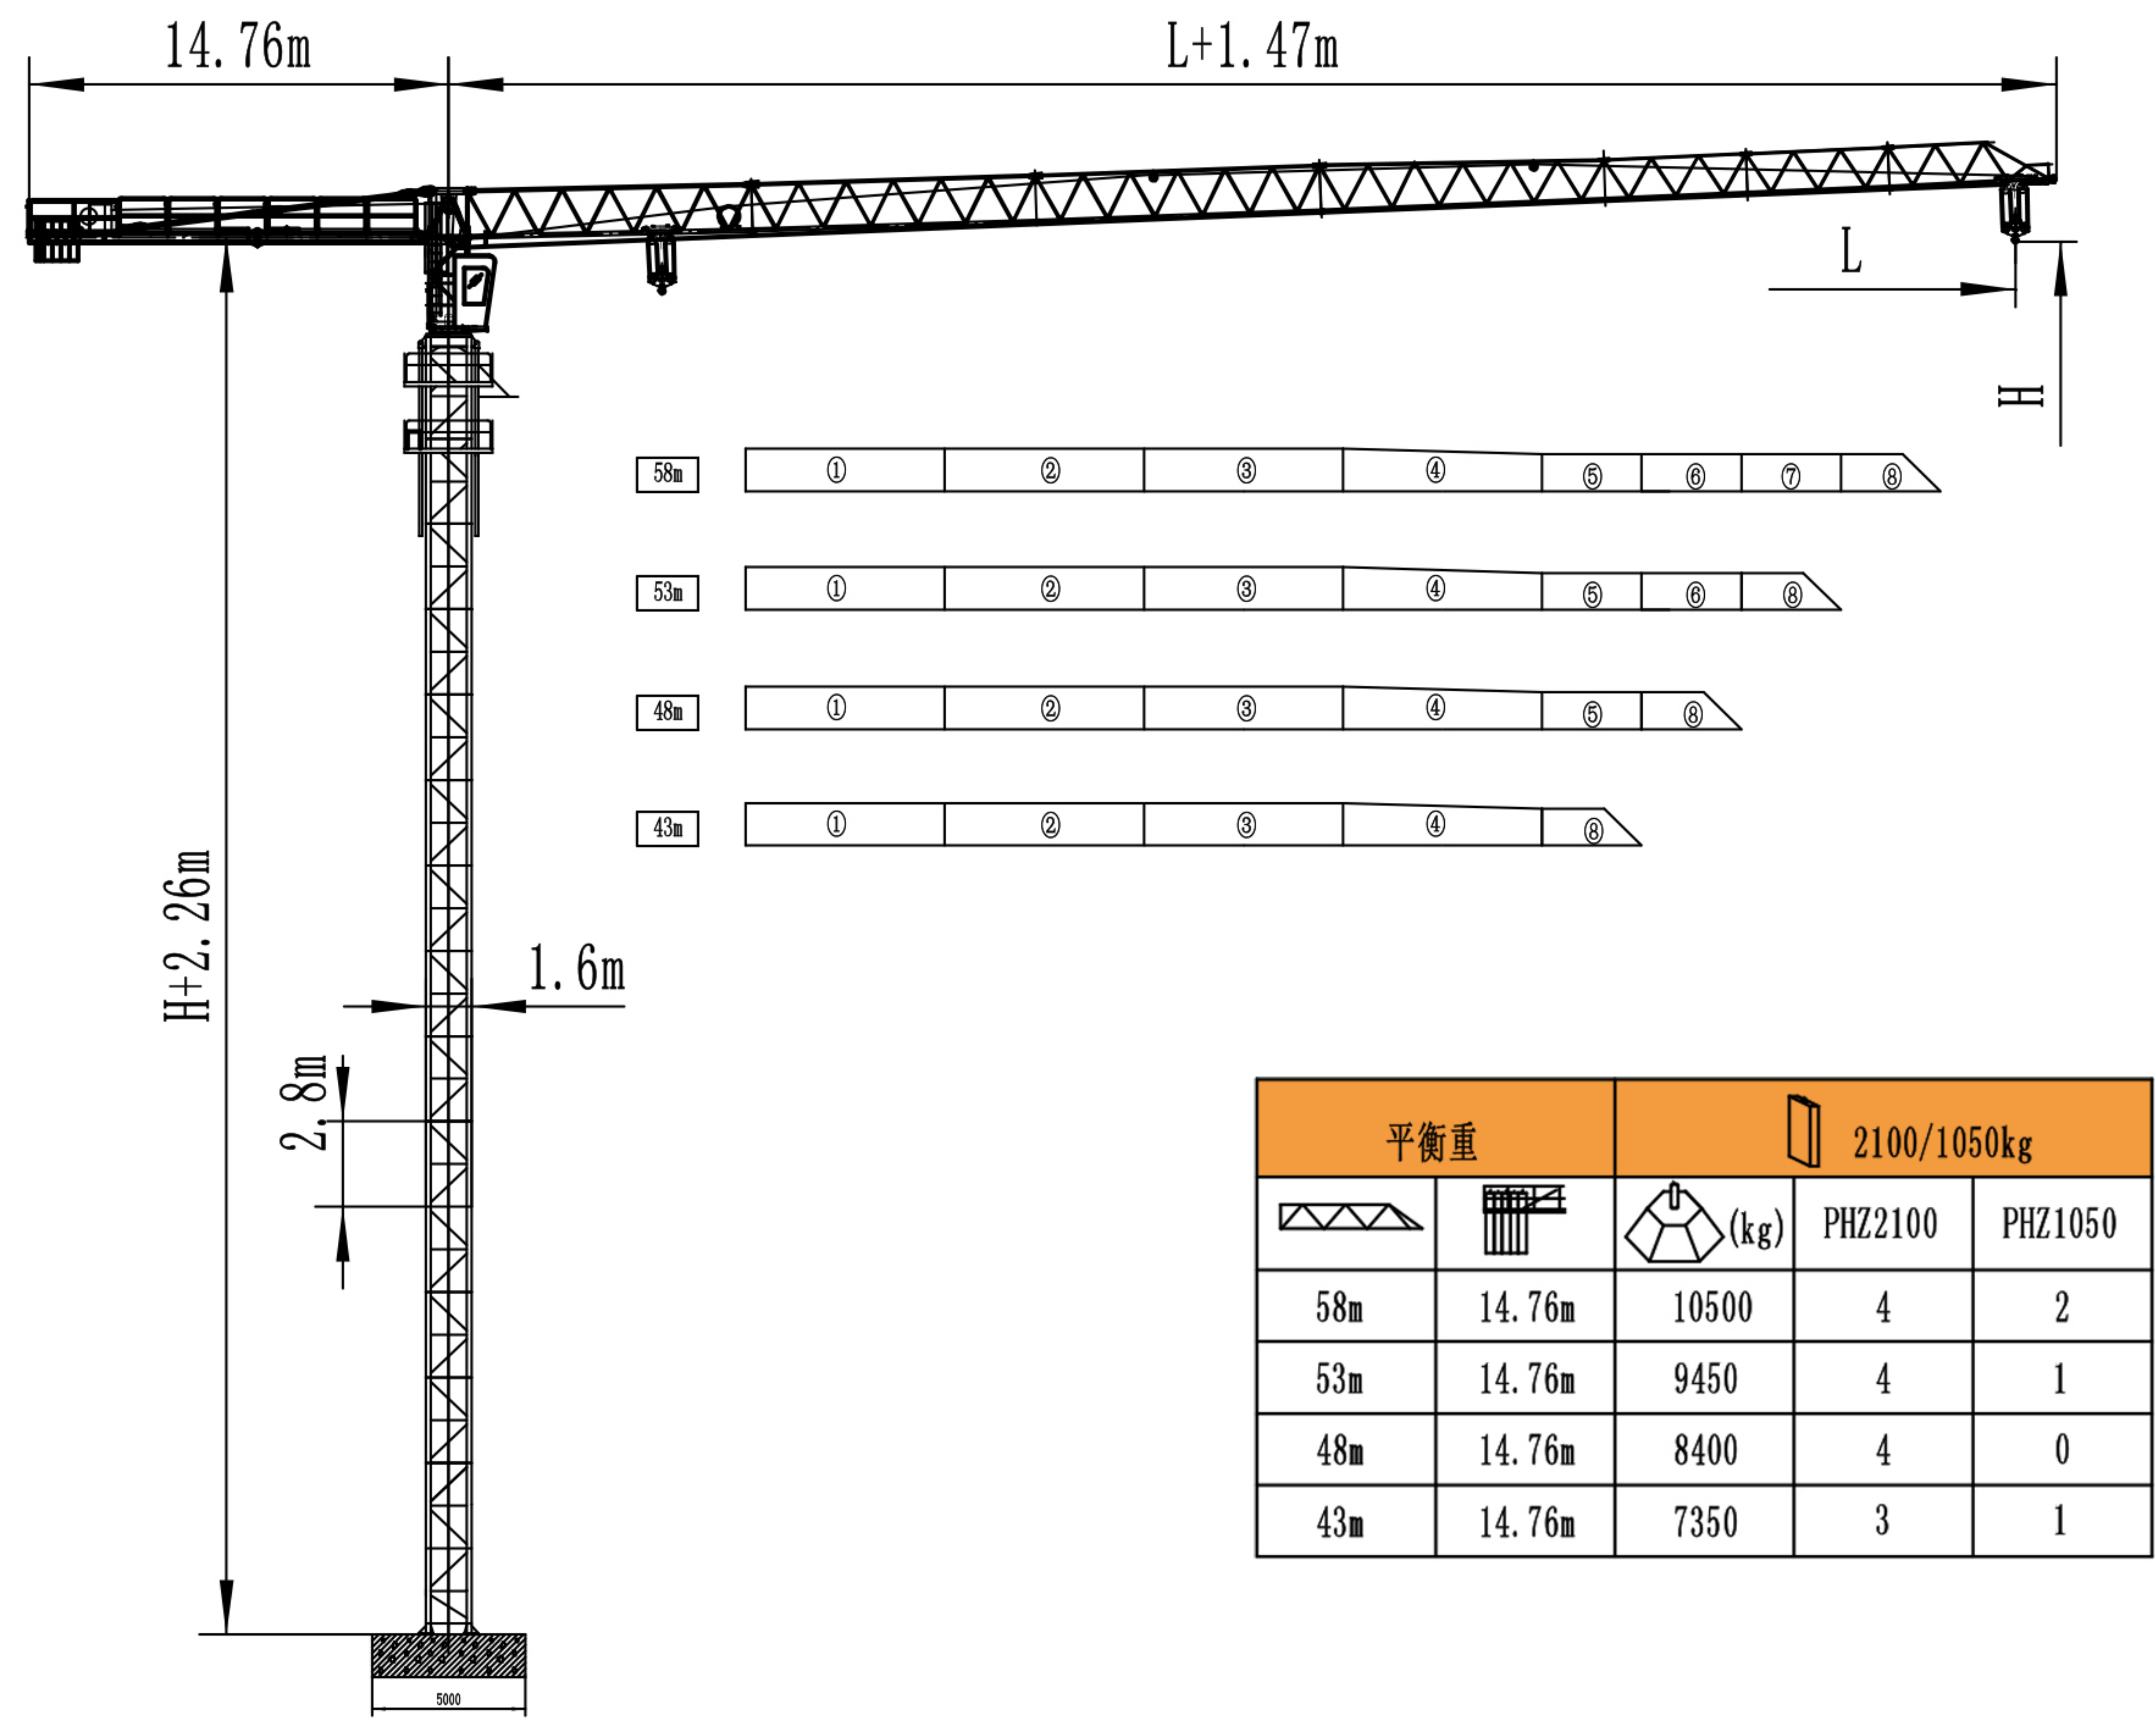


附着Anchorage

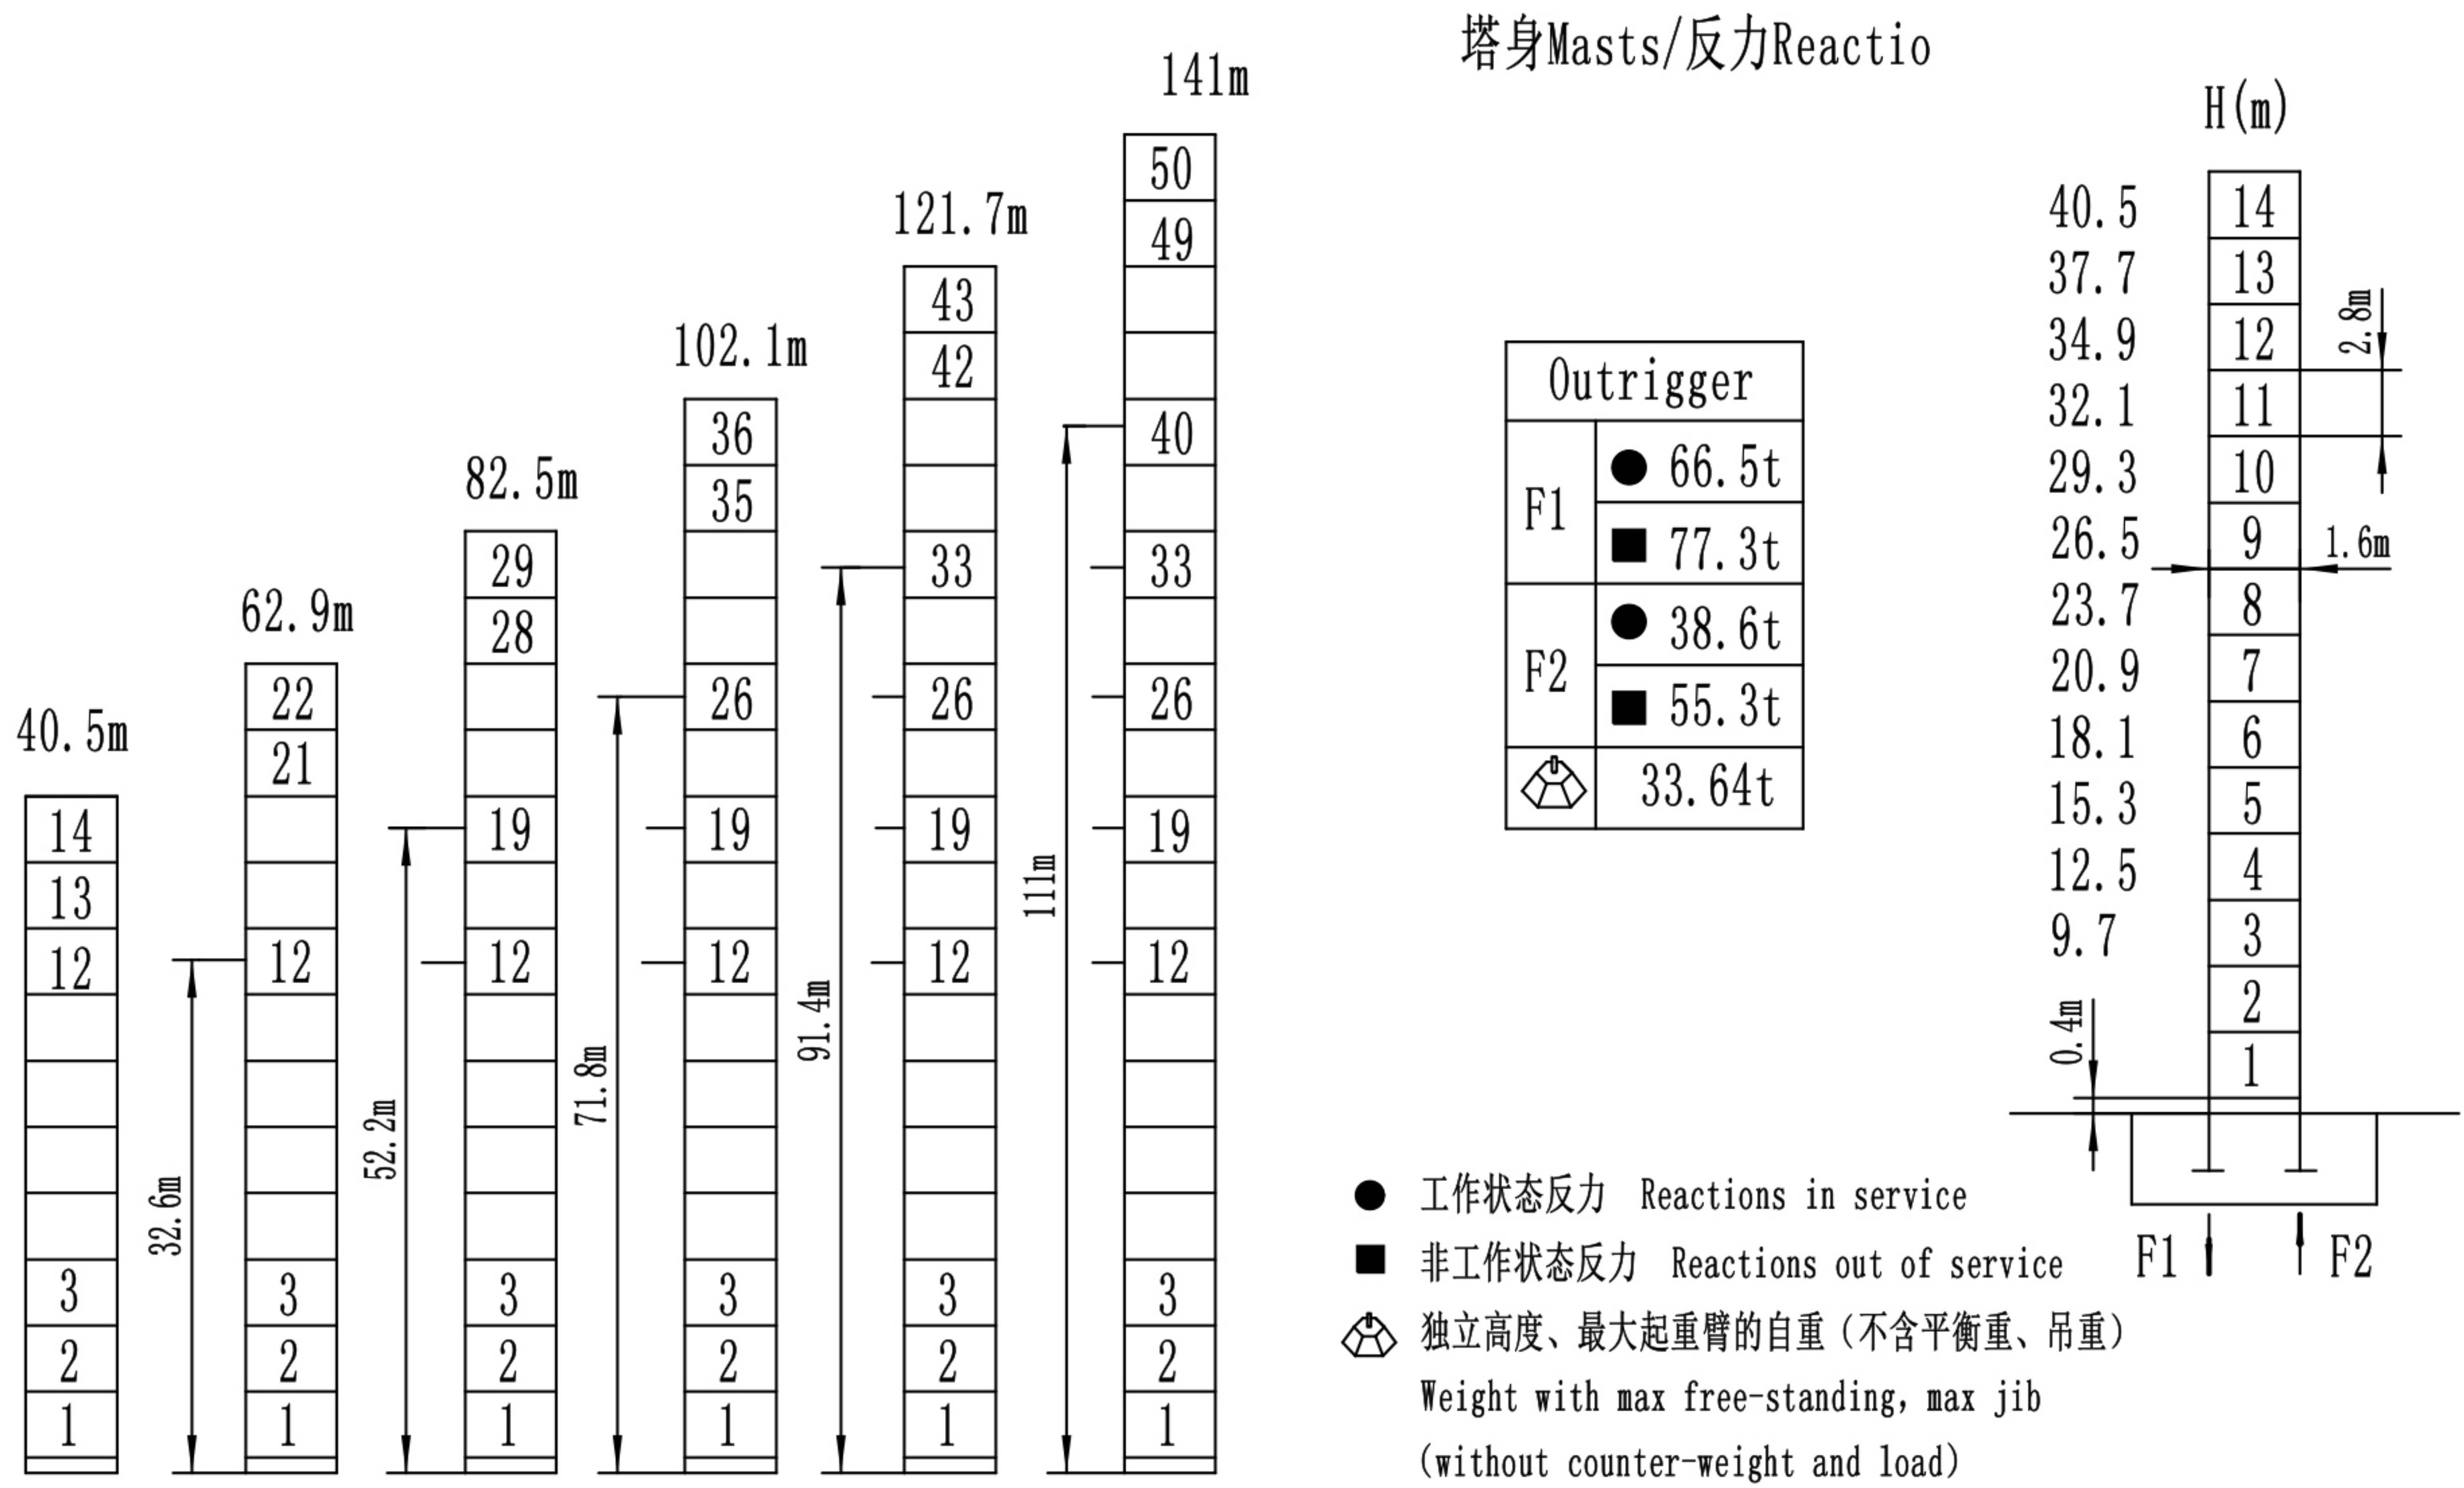

起重特性Load Diagrams

 R (m)		最大额定起重重量时的 最大工作幅度 Max Capacity (m/t)	15	20	25	30	35	40	43	48	53	58
58m臂 (R=59.47m)	bb	3-12.90/6.0	5.10	3.72	2.89	2.33	1.94	1.64	1.50	1.30	1.13	1.00
	b	3-24.54/3.0	3.00		2.94	2.38	1.99	1.69	1.55	1.35	1.18	1.05
53m臂 (R=54.47m)	bb	3-13.85/6.0	5.51	4.02	3.13	2.54	2.11	1.80	1.64	1.42	1.25	
	b	3-26.34/3.0	3.00			2.59	2.16	1.85	1.69	1.47	1.30	
48m臂 (R=49.47m)	bb	3-14.78/6.0	5.91	4.32	3.37	2.74	2.28	1.94	1.78	1.55		
	b	3-28.12/3.0	3.00			2.79	2.33	1.99	1.83	1.60		
43m臂 (R=44.47m)	bb	3-15.25/6.0	6.00	4.47	3.49	2.84	2.37	2.02	1.85			
	b	3-29.01/3.0	3.00			2.89	2.42	2.07	1.90			

传动机构Mechanisms

配置Configuration									kW	
 起升 Hoisting	QTJ63-I	m/min	80	40	8.5	40	20	4.25	24/24/5.4	320m(4 layers)
		t	1.5	3	3	3	6	6		
 回转 Slewing	QTH100	r/min	0~0.6						3.7×2	▲超出咨询我们 Consult us if overtop
 变幅 Trolleying	QTB4.0-H	m/min	40/20						3.3/2.2	
	380V(±10%)50Hz	34.7(kW)								